

TH Façade with Isolating Glass


The Innovative Building Cladding

The TH façade product was designed specifically for exterior use. Any natural stone suitable for outdoor use can be processed into TH façade.

The application of the mounting agraffes happens by simply screwing onto the montage elements cast into the carrier.

As A1 Version for Maximum Safety

Like with TH façade, the construction TH façade A1 was developed specifically for exterior use and fulfils the highest fire protection requirements.

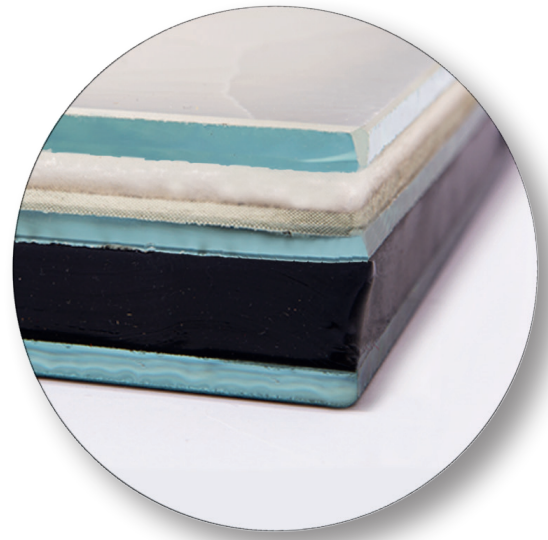

Layers:

5 mm natural stone
Fibreglass
12 mm lightweight concrete special

Thickness:

18 mm total thickness

Weight:

26,5 kg/m²

Sizes:

Maximum 260 x 125 cm

Safety/Certificate:

- Fire class B1 ⁽¹⁾
- Frost resistance ⁽²⁾
- Compressive strength and bending behaviour according to test report

Fields of Use:

- Interior
- Exterior
- Moulded parts of all kinds

Application:

- As ventilated façade
- Fixing of the agraffes by cast-in threads

Notes:

For almost all commercially available aluminium substructures

⁽¹⁾ Acc. To a test report of TH Braunschweig

⁽²⁾ Acc. To a test report of TU Berlin

Seeberger GmbH